



ProxSocket™ Installation

1. Place the gasket under the ProxSocket™ Flange

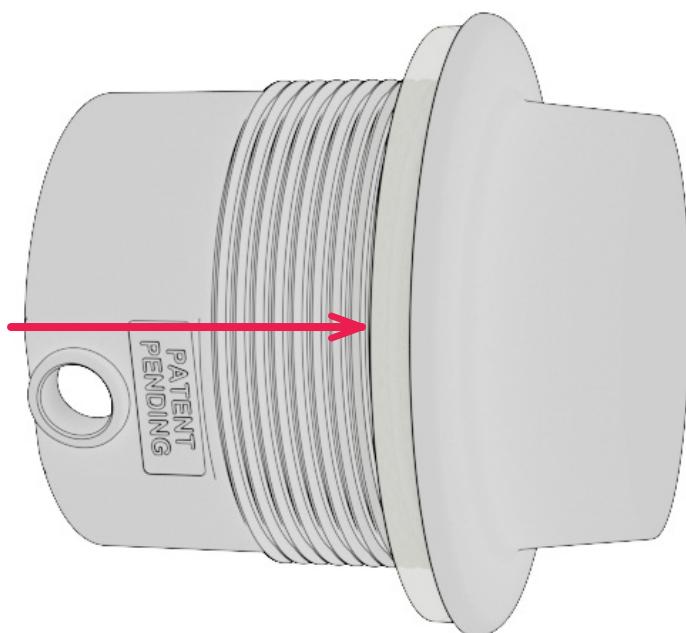


2. Insert the ProxSocket™ into a 4041mm hole in the interior wall of the vessel

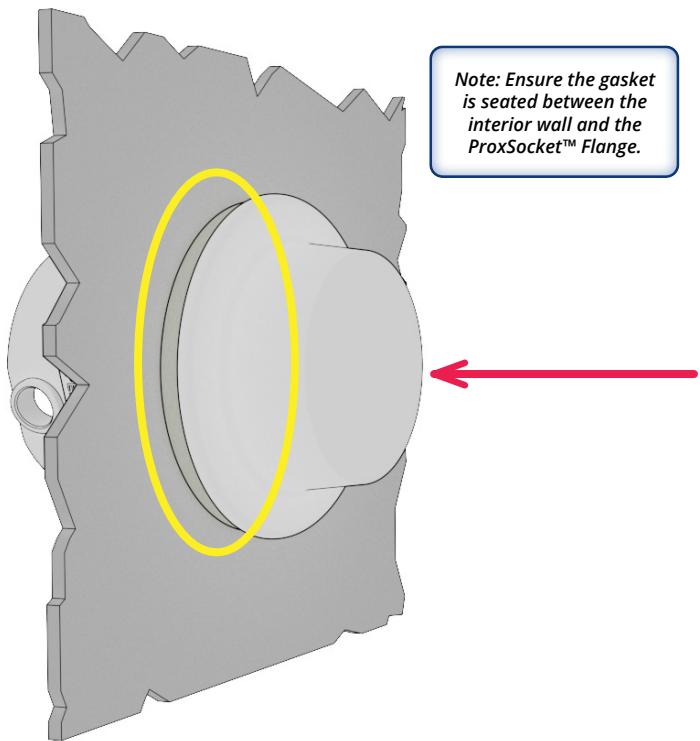

Note: Ensure the gasket is seated between the interior wall and the ProxSocket™ Flange.

3. Tighten the nut to 5-10 in-lbs onto the body of the ProxSocket™

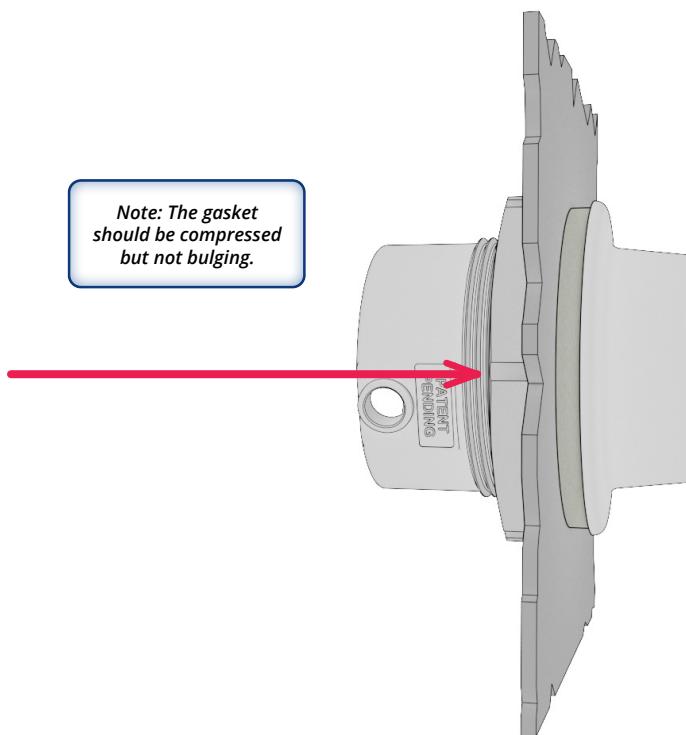

4. Hand tighten the sensor into ProxSocket™ body until it reaches the inside face

